


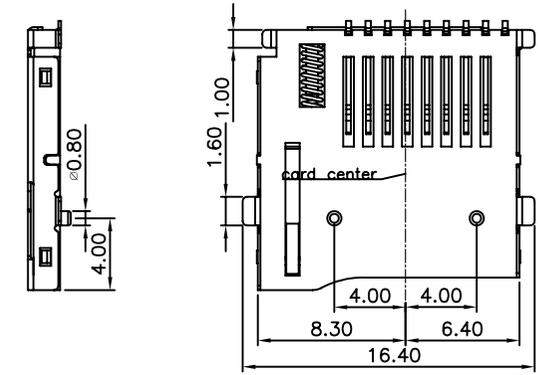
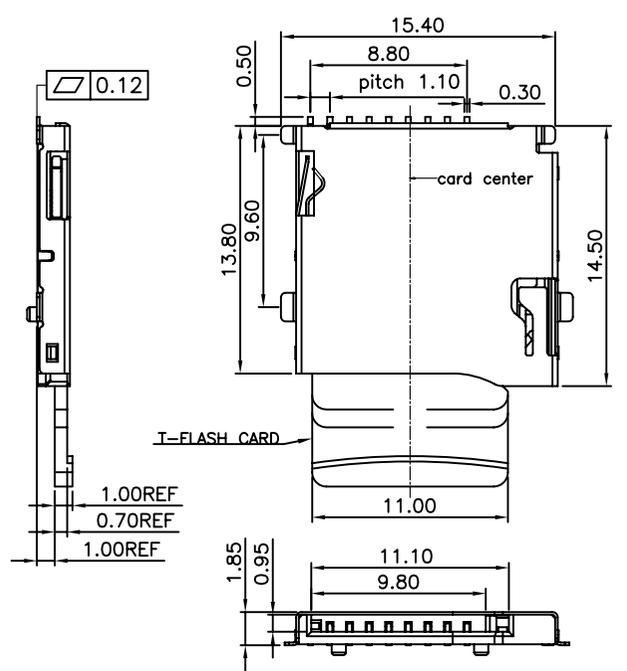


REV.	ZONE	DESCRIPTION	DESIGN	DATE
B		NEW	AME	July 11, 2017

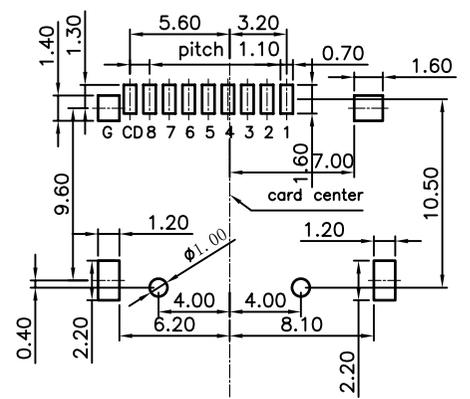

NOTES :

- ELECTRICAL CHARACTERISTICS:
 CONTACT CURRENT RATING:0.5 A
 DIELECTRIC WITHSTANDING VOLTAGE:AC500V r.m.s.
 INSULATION RESISTANCE:1000 MΩ Minimum.
 CONTACT RESISTANCE:40 mΩ Maximum.
- MATERIAL :
 INSULATOR : HIGH TEMPERATURE THERMOPLASTIC
 FLAMMABILITY RATING : UL94V-0
 CONTACT : COPPER ALLOY
 COVER : STAINLESS

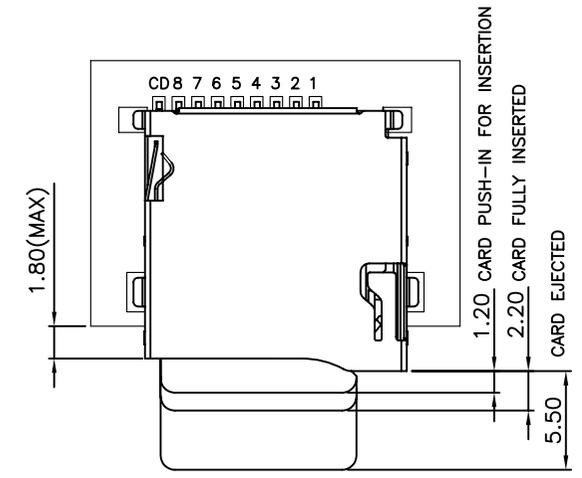

Pin No.	Pin assignment	Pin No.	Pin assignment
1	DAT2	6	VSS
2	CD/DAT3	7	DAT0
3	CMD	8	DAT1
4	VDD	Cd	CARD DETECTION
5	CLK	G	GROUND

ITEM	NAME	QTY	MATERIAL	FINISHED	NOTE
6	HINGE	1	SUS		
5	SPRING	1	SWP		
4	TERMINAL	8	C5210	Au PLATING	CONTACT AREA:Au 1u"; G/F ON SOLDER-TAIL
3	SHIELD	1	SUS	NI PLATING	50u"NI MIN UNDERPLATED
2	SLIDER	1	LCP		UL 94V-0
1	HOUSING	1	LCP		UL 94V-0



Wellco T&C Co., Ltd.

Unless otherwise specified tolerances are		DRAW NO.	FD070703-006	DATE	July 11, 2017	DRAW NAME: T-FLASH PUSH TYPE(II) 外焊式1.80H(端子等长)			
X.	±0.25	DWN	Amy	July 11, 2017	P/N # TFWF1-EBXX-1X0X				
X.X	±0.20	CHK	Billy	July 11, 2017					
X.XX	±0.15	APVD	Chin	July 11, 2017					
X.XXX	±0.10			FINISH	MATERIAL	UNIT	SCALE	REV	SHEET
X*	±2.0*			SEE NOTES		mm	1:1	B	1 OF 1
X.X*	±1.0*			Third Angle Project					