
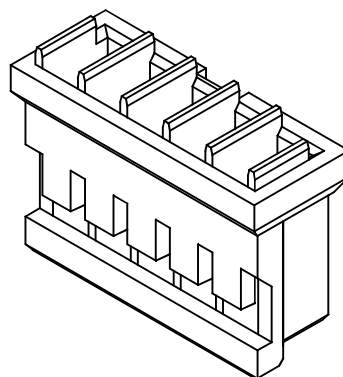
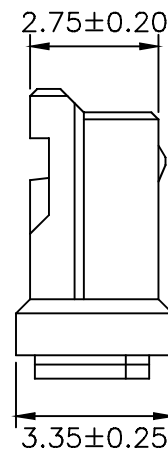
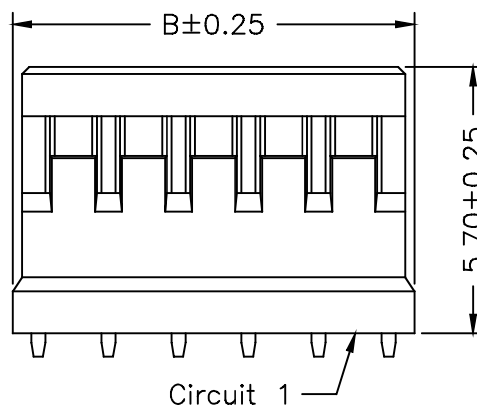
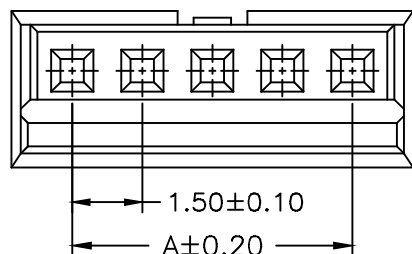


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW DWG		2006-04-13

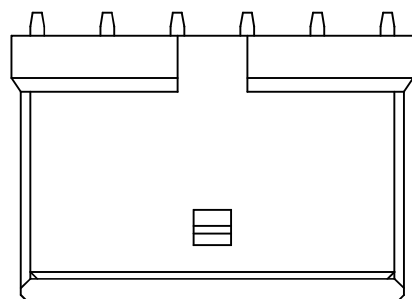


SPECIFICATIONS
 Current Rating: 3A AC,DC
 Voltage Rating: 350V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Natural(White)

Molex housing 1.5 pitch





Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
2P	1.50	4.10
3P	3.00	5.60
4P	4.50	7.10
5P	6.00	8.60
6P	7.50	10.10
7P	9.00	11.60
8P	10.50	13.10
9P	12.00	14.60
10P	13.50	16.10
11P	15.00	17.60
12P	16.50	19.10
13P	18.00	20.60
14P	19.50	22.10
15P	21.00	23.60


Wellco T&C Co., Ltd.

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表			TITLE: 产品名称: MX1.5胶壳			
X.X ± 0.30	X.X* ± 3'		PART NO: 产品编号: 1502H-XP			
X.XX ± 0.30	X.XX* ± 2'	APPD: 核准: 陈迪森	DATE	SCALE	UNIT	CODE NUMBER
X.XXX ± 0.10	X.XXX* ± 1'	CHECK: 校对: 许忠茂	2006-04-13	1:1	mm	A012
		DRAW: 绘图: 雷金乔				

Molex pin terminal 1.5 pitch

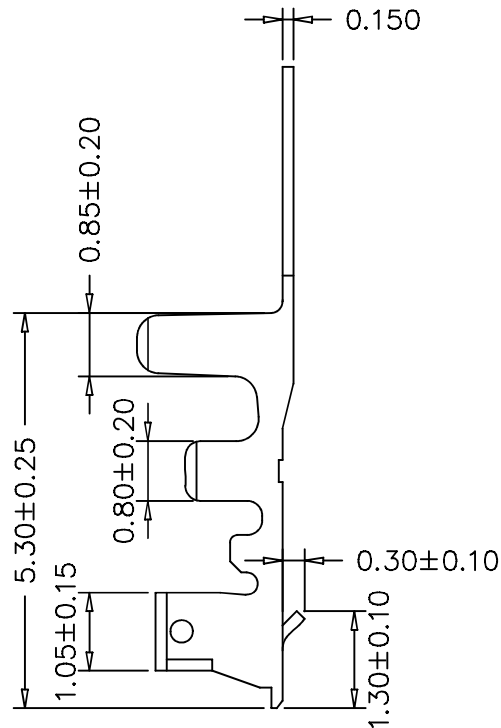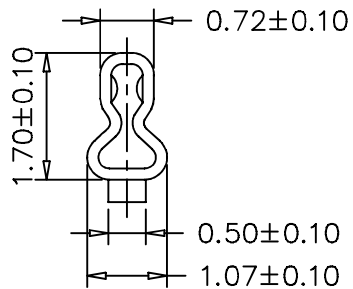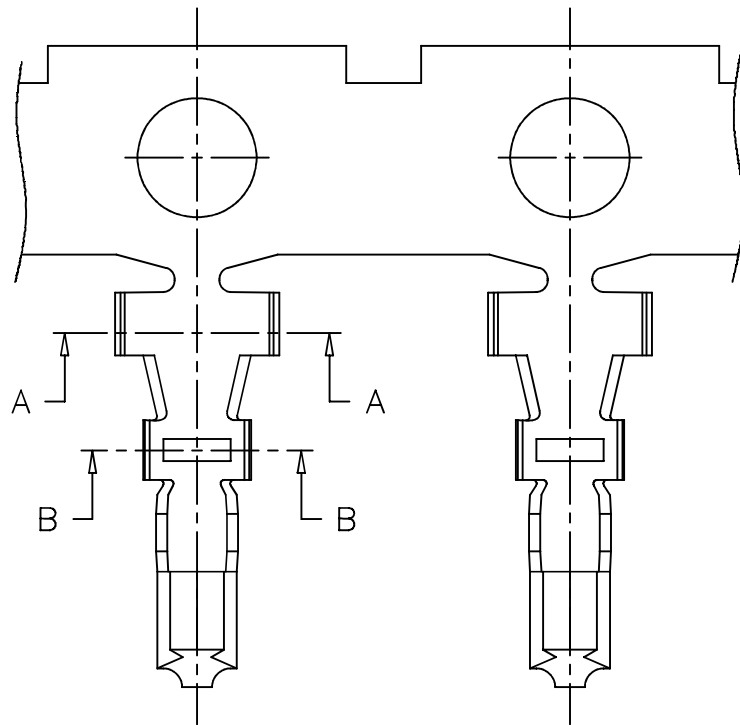


SEC: A-A



SEC: B-B

Wellco T&C Co., Ltd.

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表		TITLE: 产品名称: MX1.5端子	
X.X ± 0.30	X.X° ± 3°	PART NO: 产品编号: 1502-T	
X.XX ± 0.30	X.XX° ± 2°	DATE	SCALE
X.XXX ± 0.10	X.XXX° ± 1°	UNIT	CODE NUMBER



APPD:
核准: 陈迪森

CHECK:
校对: 许忠茂

DRAW:
绘图: 雷金乔

2009-08-10

1:1

mm

A012