




Without nut

备注: 1. 出货时螺母、垫片、弹片分开包装
2. S M A 母头需套上防水垫圈
3. S M A 母头需套上红帽子

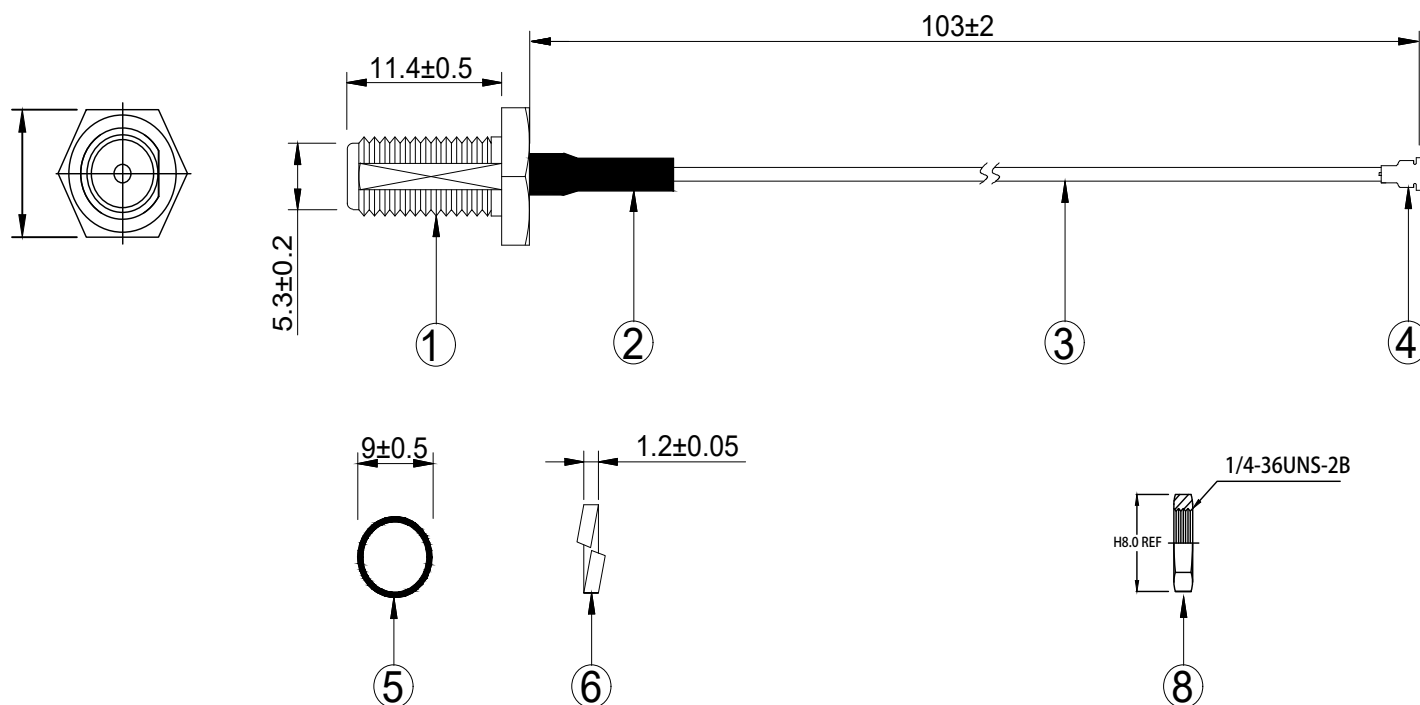

Specification:

Frequency Range: 0-6GHz

Impedance: 50Ω

VSWR: 1.5 max

8	Nut	Brass Gold Plated	1	
7				
6	Washer	Brass Gold Plated	1	
5	Washer	Silica gel	1	
4	CONN	RF 1.13 Connector	1	
3	Cable	RF 1.13 Black	1	
2	Tube	Heat Shrinkable Tube Black	1	
1	CONN	SMA Female;Waterproof	1	
NO	DESCRIPTION		Q'TY	REMARK



Wellco T&C Co., Ltd.

Gen.Tolerance	Scale	Not
.X ± 0.20	Unit	mm
.XX ± 0.08		
.XXX ± 0.05	Size	
∠±1°		

P/N # W09041-13B
SMA female to UFL with 1.13 cable

This spec drawing is
under the property of
Wellco T&C Co., Ltd.

Rev. A
Page 1-1

DRW by	Amy Nov.17, 2021
CHK by	Long Nov.17, 2021
APP by	Chin Nov.17, 2021