

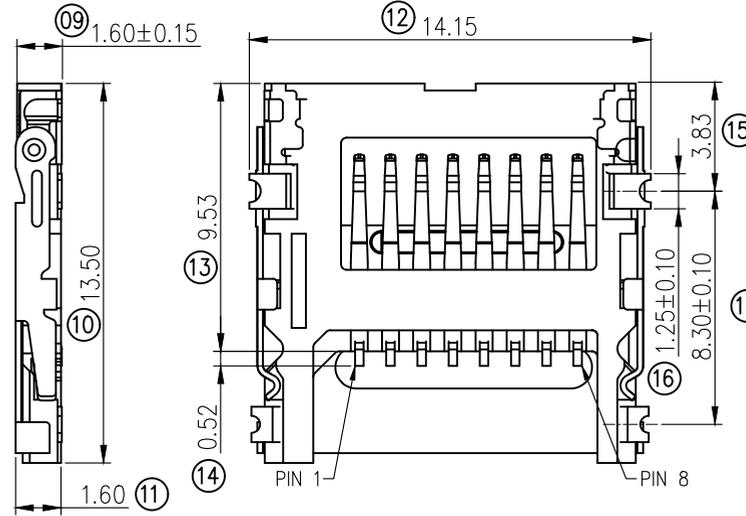
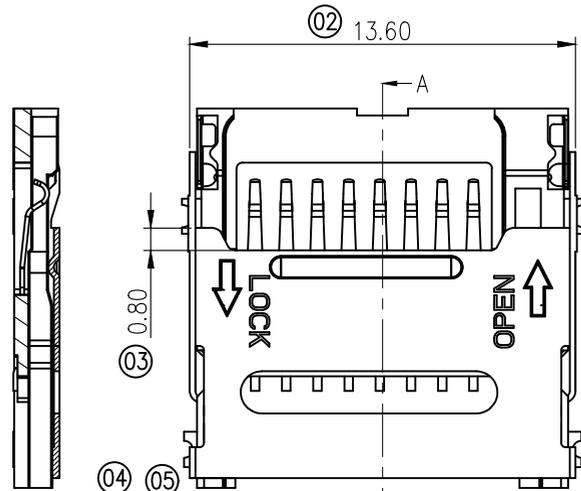



RoHS

REV.	ECN.#	DESCRIPTION	NAME	DATE
A0		NEW RELEASE	huangzipeng	2024.05.15

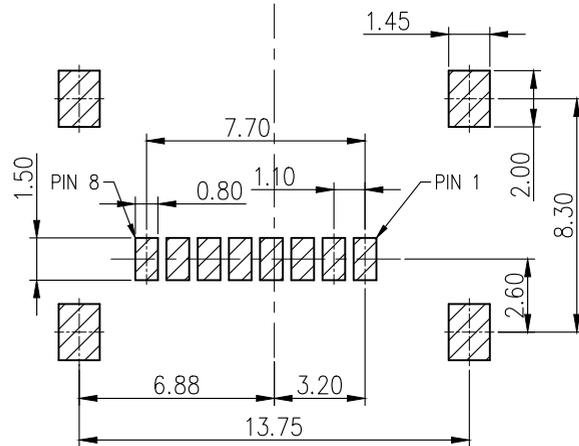

SECTION: A-A

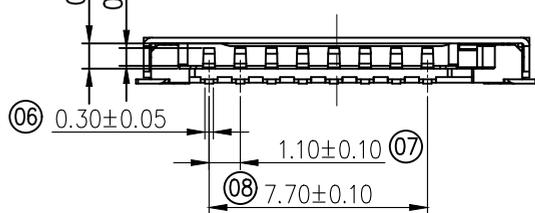


Recommend PCB Layout

Tolerance: ±0.05

NOTES:

- MATERIAL:
 - HOUSING: LCP UL94V-0; COLOR: BLACK
 - TERMINAL: C2680
 - SHELL: SUS201
- FINISH:
 - TERMINAL: G/F PLATED ON CONTACT AREA; Tin 60u" MIN PLATED ON SOLDER AREA; Ni 30u" MIN. UNDERPLATED OVERALL.
 - SHELL: CLEANING.
- ELECTRICAL SPECIFICATION:
 - RATED CURRENT: 0.5A
 - CONTACT RESISTANCE: 80mΩ MAX.
 - INSULATION RESISTANCE: 1000MΩ MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC .
- MACHINERY SPECIFICATION:
 - DURABILITY: 1000 CYCLES .
- ENVIRONMENTAL SPECIFICATION:
 - OPERATING CONDITION: TEMPERATURE -40°C~+85°C; HUMIDITY 80% R.H MAX
 - SALT SPRAY: 24H.
 - SOLDER ABILITY: 245±5°C, 5±0.5s
 - IR REFLOW: THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

PIN NO.	PIN Assignment
PIN1	DAT2
PIN2	CD/DAT3
PIN3	CMD
PIN4	VDD
PIN5	CLK
PIN6	Uss2
PIN7	DAT0
PIN8	DAT1



MILLIMETERS	INCH
X.* ±2'	X.* ±2'
.X ±0.30	.X ±0.012
.XX ±0.20	.XX ±0.008
.XXX ±0.10	.XXX ±0.004

Wellco T&C Co., Ltd.

TITLE	1.6H TF 掀盖卡座 平口外壳	DR	Amy 110711
PART NO.	P/N # TFXF2	CHKD	Chin 110711
PRO J.	PAGE 1/2	UNITS mm	APPD Billy 110711
SIZE	A4	SCALE 1:1	DIS NO.