
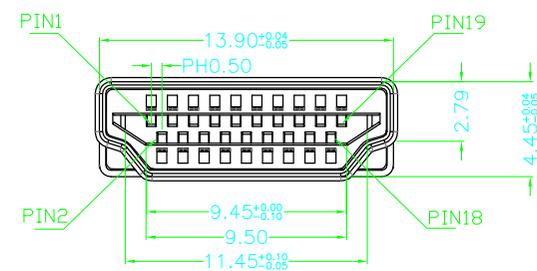
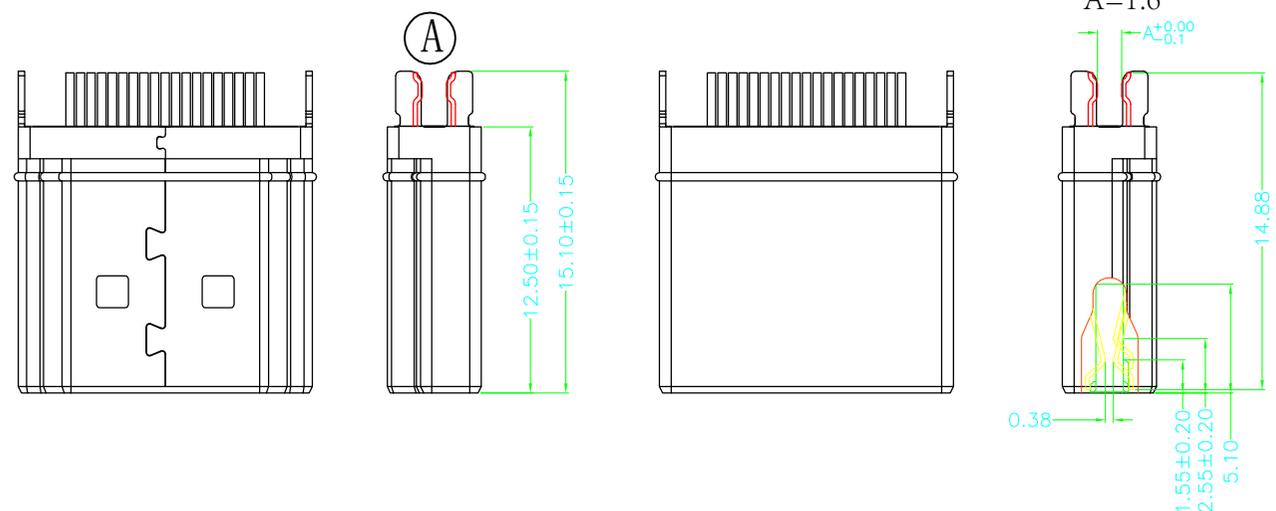



REV.	ECN NO.	DESCRIPTION	DESIGN
A0		INITIAL RELEASE	Simon

HMA19M8068-010	1.0MM
HMA19M8068-012	1.2MM
HMA19M8068-016	1.6MM

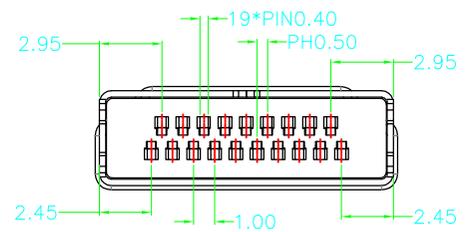

NOTE :

- SPECIFICATION
 - CURRENT RATING: 0.5 Amp Max.
 - VOLTAGE RATING: 40 V ac(r.ms) Max.
 - CONTACT RESISTANCE: 10mohms Max. rated
 - INSULATION RESISTANCE: 100Mohms Min.
 - DIELECTRIC WITHSTANDING VOLTAGE: AC 500V Min. (for 1 minute)
 - OPERATION TEMPERATURE RANGE: -25°C~85°C
- MECHANICAL
 - INSERTION FORCE: 4.5KGF MAXIMUM
 - WITHDRAWAL FORCE: 1.0KGF MINIMUM, 4.0KGF MAXIMUM

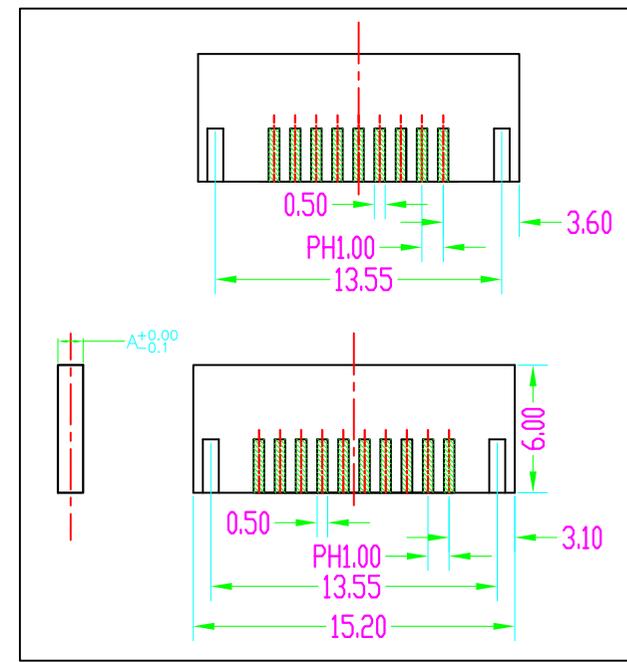

序号	品名	材料	用量	备注说明	表面处理
03	Terminal	C5191	19	Gold plated within connect area ,	电镀锡/镍/金
02	Housing	LCP	1	Color is black LCP UL94-V0	注塑成型
01	Shell	H65/SPCC	1	Plating nickle or gold overall	电镀:镍/金

DIM	TOL	DIM	TOL
.0	± 0.3	X°	± 2°
.00	± 0.20	.X°	± 1°
.000	± 0.10	.XX°	± 0.5°

Wellco T&C Co., Ltd.

PART NO: P/N# HDA19MG1003R	TITLE: HDMI AM夹板式(1.0&1.2&1.6) 有肋+D款
APPD: Simon 2012.4.22	DWG NO: HMA8068
CHKD: Simon 2012.4.22	UNITS: mm
DR: Simon 2012.4.22	SCALE: N/A
	SHEET: 1/1
	REV: A0

由 AUTODESK 教育產品製造

由 AUTODESK 教育產品製造